



Congratulations to your new Jomox eurack module!

You can download the full operating manual on the following links:

www.jomox.de/upload/manuals/T-Rackonizer_E.pdf

In order to save the environment we want to minimize the use of paper because most people read only on their digital mobile devices in the internet anyway. We hope for your understanding!

Here you can find the quick installation guide which is part of the operating manual too. Have fun with the module!

Your Jomox team

1. Installation

Please turn off the euro rack prior to the wiring! On the backside of the T-Rackonizer module you can find these connections:



1.1. Installation in the eurorack

Please connect the supplied ribbon cable to the eurorack system bus rails as shown on the pictures. The module needs +/-12 Volts at a supply current of maximum 130mA on +12V and about 70mA on -12 Volts. The optional 5 Volts and the CV/Gate on the A-100 Doepfer bus are both not wired inside the Jomox module and not needed.

Other 10 pin systems may be used as well if only the lower part of the 16 pin connector is connected.

Please pay attention for the position of the voltages and the ground pins!


The printed voltages must match, please check the wires again and make sure no pin is left or bent.

There are protection diodes inside the modules but please take extra care to protect the rack and the module!



A-100 Doepfer bus. (The Doepfer GmbH enterprise and all of their shown products are registered trademarks. With friendly approval of Doepfer Musikelektronik GmbH)

Jomox T-Rackonizer euro rack supply connector. Please connect the power supply of the eurorack system bus *here*.

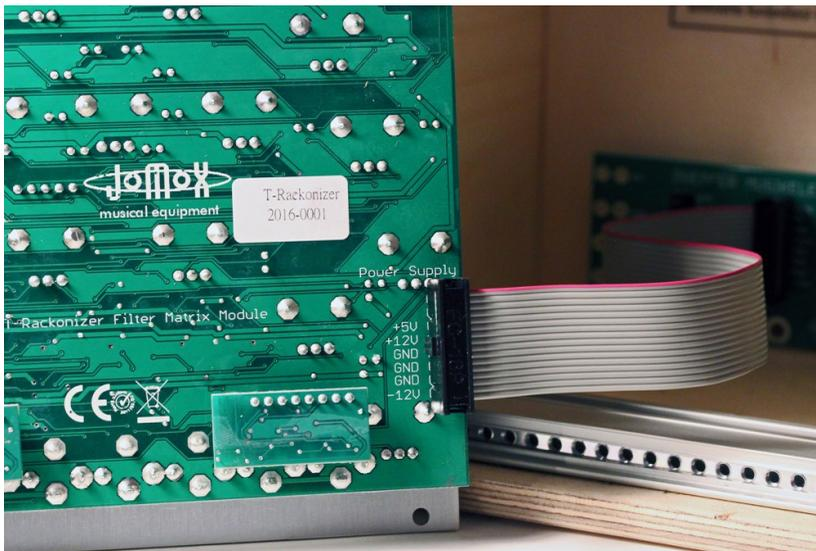

Attention: DO NOT connect, under any circumstances, the power supply cable to the Jomox Inter-D-module bus!!! The rack power supply and the module could get seriously damaged!

Then please mount the module on the rack rails using the supplied metric M3 screws.

